


Collection: Xavier

Installation manual for:

LD7050F26BK/BR D25.8" H6.2" L4

Installation instructions:

- 1. Black wire from ceiling(junction box) attaches to "L"wire from the fixture.
- 2. White wire from ceiling(junction box) attaches to "N"wire from the fixture.
- 3. "E" wire from the fixture is attaced to the mounting bracket and an additional "E" wire from the mounting bracket must be secured to the junction box.
- 4. Secure mounting bracket to the junction box.
- 5.Insert the mounting bracket screw(P2) into the mounting bracket (P1)
- 6. Separate and adjust the lamp arms, Use the screw(P3) to lock the lamp body to the mounting bracket(P1) on the ceiling.
- 7.Install E26 light source.(Bulbs not supplied) The end!

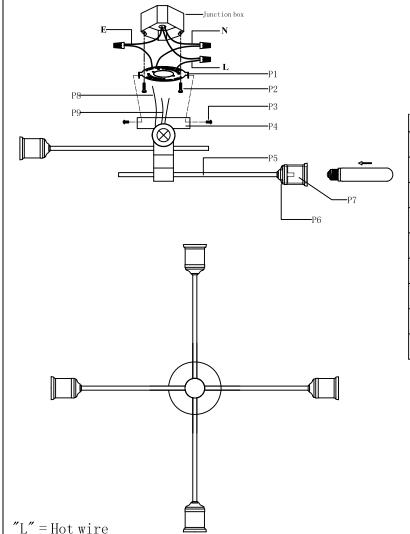

"N" = Neutral wire "E" = Ground wire

| Part | Picture | Description | Qty | Check list |
|------|---------------------|-----------------------------------|-----|------------|
| P1 | | mounting bracket Φ4.53″*H0.59″ | 1 | |
| P2 | 01111111)) | Mounting bracket screw | 2 | |
| Р3 | • | Screw | 2 | |
| P4 | | Сапору Ф 4.72"*Н0.98" | 1 | |
| Р5 | | Lamp arm L14.7″*H1.2″ | 4 | |
| P6 | | сир Ф2.1"*Н2.6" | 4 | |
| P7 | | E26 holder | 4 | |
| P8 | | UL18#Ground wire, L9.84" | 1 | |
| Р9 | \approx | UL18#, L6″ | 1 | |